


PLANETARY GEARBOX GPL065

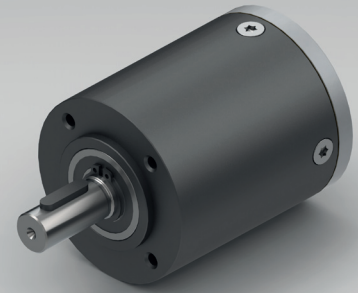

		1-STAGE	2-STAGE	3-STAGE			
Ratio i:1	Max. motor shaft-ØD	Ratio i:1	Max. motor shaft-ØD	Ratio i:1	Max. motor shaft-ØD		
				49	12		
				56	12		
				12.25	14	64	12
				14	12	70	12
				16	12	80	12
				20	12	100	12
				24	12	120	12
				25	9	144	12
				3.5	14	30	9
4	12	30.67	12	235.11	12		
5	9	38.33	9	293.89	9		
6	6	46	6	352.67	6		
7.67	5	58.78	5	450.63	5		

Standard scope of delivery Gearbox lubricated for duration of service life, dust-proof package, motor pinion, mounting screws, paper gasket and assembly instructions (adapter plate optional).
Customized versions also available for small quantities.

Rated torque continuous	Type Standard	Type R	Nm	3	15	38
Rated torque intermittent	Type Standard	Type R	Nm	6	30	75
Rated torque continuous	Type V	Type S	Nm	6	30	38
Rated torque intermittent	Type V	Type S	Nm	12	38	75
Max. efficiency at rated torque			%	90	85	80
Average backlash at no load	Type Standard	Type V	arcmin ≤	20	35	50
Average backlash at no load	Type R		arcmin ≤	10	20	30
Average backlash at no load	Type S		arcmin ≤	6	12	15
Weight without adapter plate			g	1000	1400	1750
Dimension L			mm	53.5	71.5	89.5
Dimension L1			mm	32		30
Dimension A			mm	13		11
Dimension B			mm	34		32
Max. radial load	F _R	15 mm from shaft end	N		400	
Max. axial load	F _A		N		320	
Max. continuous rated speed at drive			min ⁻¹		4000	
Max. intermittent rated speed at drive			min ⁻¹		6000	
Temperature range			°C		-25 / +90	

Type V = heavy duty version | Type R = reduced backlash version | Type S = low backlash version

Changes reserved © GYSIN AG | 10/2014